




AERUS

The Healthy
Home Experts®

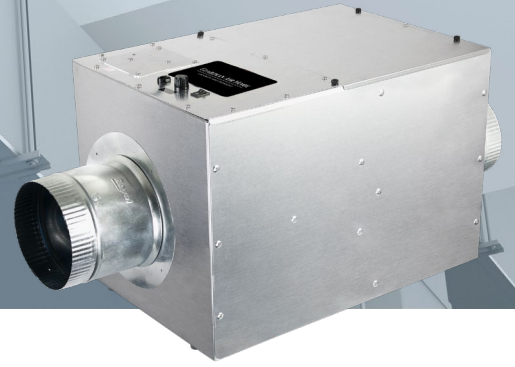

Features ActivePure Technology proven to reduce viruses, bacteria, and other pathogens (full list of tested pathogens available below in “The Proof”)

THE TECHNOLOGY

The Aerus Guardian Air Home combines multiple complementary technologies, including a pre-filter, HEPA, activated carbon, and ActivePure Technology. Patented ActivePure Technology is the most powerful surface and air purification ever discovered. It has been proven to reduce over 99.9% of many common airborne and surface contaminants (list of tested pathogens can be found in “The Proof” section below).

ActivePure does not replace the need to follow CDC guidance and should be used as a complementary technology.

THE PROOF

In extensive independent lab testing, ActivePure® Technology has been proven to significantly reduce the following contaminants and pathogens:

- SARS-CoV-2 – RNA Virus
- H1N1 Influenza
- H5N8 Influenza
- Murine Norovirus
- PhiX-174
- MS2 Bacteriophage
- MRSA
- E. coli
- Salmonella enterica
- Legionella pneumophila
- Clostridium difficile
- Bacillus globigii
- Erwinia herbicola
- Listeria monocytogenes
- Candida auris
- Botrytis cinerea
- Sclerotinia sclerotiorum
- Aspergillus versicolor
- Aspergillus niger endospores
- Methicillin-resistant Staphylococcus epidermidis
- Staphylococcus epidermidis

THE BENEFITS

The Aerus Guardian Air Home provides continuous surface decontamination and air purification in real time without the use of ozone or other harmful chemicals. It is a proactive and effective solution for your home or business.

- New and improved ActivePure Technology is the most powerful surface decontamination and air purification technology ever discovered
- Provides continuous surface decontamination and air purification in real time
- A 4-stage filtration process is used to create a very effective filtration system.
- Quickly and powerfully works to clean the indoor environment
- Protects heating and cooling system from dust buildup





GUARDIAN AIR HOME

SPECIFICATIONS

Product Information	00700 Model F193B Meets California ozone emissions limit. CARB Certified.
Technology Included	ActivePure
Electrical	Supply Voltage: 120 VAC Power Consumption: 1.45 Amps; 96 Watts
Mechanical	Air Flow: 300 CFM Air Intake Collar: 6" round Air Outtake Collar: 6" round
Weight & Dimensions	14.35 lbs (6.5 kg) 13.5" W x 13.5" H x 19.5" D (34 cm x 34 cm x 50 cm)
Operating Temperature	(Return Air) 30° F to 95° F (-1 C to 35 C)
Recommended Maximum Coverage in a Contiguous Space ¹	Up to 3,000 sq. ft. (278m ²) depending on occupant density and other factors ¹ . High density commercial not to exceed 1,500 sq. ft. (139m ²).
Warranty	Limited 5 year warranty (Terms & Conditions apply)



Contact Name: _____



Email: _____



Phone Number: _____

1. Assumes 8 foot ceilings. Solutions should be customized based upon a variety of factors including HVAC system capabilities and settings, air flows taking into account walls, air pressure, and doors, ambient air temperatures and humidities, variable density, known VOC concentrations, other layers of protection, and worst case desired outcomes